

MDG100DF4CAN6 | 4.5 L | 100 kVA

MOBILE DIESEL GENERATOR SET

EPA Emissions Certification: Final Tier 4

GENERAC®

MOBILE

Standby Power Rating

85 kW, 106.25 kVA, 60 Hz

Prime Power Rating

80 kW, 100 kVA, 60 Hz



Image used for illustration purposes only

Codes and Standards

Generac Mobile products are designed to the following standards:



CSA



NATM



TIER 4 FINAL EMISSIONS



ISO 8528-5

Power When and Where You Need It

Generac Mobile diesel generators are designed and engineered to power a variety of projects, in the most extreme environments. Gensets are configured to meet customer needs, including choice of containment, cold weather packages, trailer options, and more.

Generac Mobile diesel generators are manufactured to deliver reliable power, when and where you need it.

STANDARD FEATURES

ENGINE SYSTEM

- John Deere® 4045HFG04A
- 4 cylinder
- Turbocharged
- 275 in³ (4.5 L) displacement
- EPA Final Tier 4
- Block heater
- Two fuel filter heaters
- CCV multi-heater system
- Oil pan heater
- Battery heater
- 60/40 coolant
- Power @ 1,800 rpm – hp (kW):
 - Prime: 122 (90)
 - Standby: 133 (99)

Fuel System

- Fuel tank capacity – gal (L):
 - Total: 165 (625)
 - Usable: 146 (552)
- Maximum run time @ 100% load: 24 h
- TC fuel tank
- 110% fluid containment
- Fuel consumption @ prime – gal/h (L/h):
 - 25% load: 1.90 (6.37)
 - 50% load: 3.17 (12.02)
 - 75% load: 4.51 (17.07)
 - 100% load: 6.01 (22.72)

Cooling System

- Capable of operating at 107 °F ambient
- Oil filter: Spin-on cartridge
- Air filter: Disposable – paper element
- Radiator and oil drains plumbed to exterior

SYSTEM OUTPUTS

- Voltage selection switch: 3-position, lockable
 - 1-phase: 120/240 V zig-zag
 - 3-phase: 120/208 V low wye
 - 3-phase: 277/480 V high wye
 - 3-phase: 346/600 V high wye
- Electrical power output – kW (kVA):
 - 1-phase standby: 55/55
 - 1-phase standby: 51 (51)
 - 3-phase standby: 85 (106.25)
 - 3-phase prime: 80 (100)

GENERATOR

- 60 Hz engine/generator
- Marathon Electric® 362PSL36115
 - Brushless
 - 4-pole
 - Class H insulation

- Voltage regulation $\pm 1.0\%$ with PM600 voltage regulator

ENCLOSURE

- Aluminum, sound attenuated enclosure
 - UV and fade resistant, high temperature cured, white polyester powder paint
 - Insulated and baffled
 - 74 dB(A) @ 23 ft (7 m) @ prime power
- Fully lockable – including doors, fuel fill, and DEF fill
- Exterior emergency stop switch
- Central lifting point
- Multi-lingual operating and safety decals
- Document holder with owner's manual – includes AC and DC wiring diagrams

TRAILER

- DOT approved tail, side, brake, and directional lights; recessed rear lights
- Surge brakes
- Transportation tie downs
- Safety chains with spring loaded safety hooks
- 3 in (76.2 mm) ring hitch
- Single axle – 6,000 lb (2,722 kg)
- 2,000 lb (906 kg) tongue jack w/footplate
- Tires: 15 in (381 mm), 10-ply, tubeless, load range E

WARRANTY

- 2 year limited or 2,000 hours
 - Unlimited hours covered in first year

CERTIFICATIONS

- CSA certified

SYSTEM CONTROLS

Power Zone® Controller And Display

- Backlit, 800×480 pixel resolution color display
- -40—185 °F (-40—85 °C) operating temperature range
- Automatic coarse voltage adjustment
- Integrated fine voltage adjustment
- PLC functionality

Push Buttons For Easy Operation

- Manual or Auto start
- Engine start
- Engine stop/reset
- Alarm mute
- Operator screens:
 - Home
 - Engine
 - Generator
 - Voltage Adjust

Scrolling Arrows for Diagnostic Information

- Engine diagnostic display
 - Oil pressure
 - Engine temperature
 - Fuel level
 - Battery
 - After-treatment inlet/outlet temperature
 - Ash/soot levels
- Generator diagnostic display
 - System kW output display
 - Line output and frequency display
- Alarms
 - Warning
 - Shutdown
 - Electrical Trip
 - Engine
- Alarm list – warnings/shutdowns; 250 event history log – date/time stamp
 - Fuel level: warning – 15%; shutdown – 5%
 - Over speed protection: shutdown – 115%
 - Oil pressure: warning – 25 psi (172.4 kPa); shutdown – 20 psi (137.9 kPa)
 - Coolant temperature: warning – 230 °F (110 °C); shutdown – 235 °F (113 °C)
 - Battery voltage: over – 15 VDC; under – 11 VDC
 - Generator over voltage: warning – 110%; electrical trip – 125%
 - Generator under voltage: warning – 91.4%; shutdown – 70%
 - Generator over frequency: warning – 102.5%; electrical trip – 110%
 - Generator under frequency: warning – 95%; electrical trip – 90%
- Inputs/outputs
- Auto-schedule
- Status
- View controller functional parameters (configuration, firmware version, connections)

ELECTRICAL CONTROLS

- Remote start/stop contacts in receptacle box
- Lockable control box door with diagnostics window
- Lockable lug box with safety switch
 - Trips main breaker when door is opened
 - Disables voltage regulator
- Output ground connection lug inside lug box
- 400 A main breaker with shunt trip
- Convenience receptacles with individual breakers (restricted use in high wye mode)
 - Two 120 V, 20 A, GFCI, duplex outlets (NEMA 5-20R type)
 - Three 125/250 V, 50 A, 3-pole, 4-wire, twistlock outlets (Non-NEMA 6369)
- One 12 V, 720 CCA, wet cell battery
- Buck transformer

MDG100DF4CAN6 | 4.5 L | 100 kVA

MOBILE DIESEL GENERATOR SET

EPA Emissions Certification: Final Tier 4



OPTIONS*

ENGINE SYSTEM

- Positive air shutdown

FUEL SYSTEM

- Leak detection
- Extended run fuel and DEF system

TRAILER

- Electric brakes
- Tandem axle
- Stabilizer jacks
- Tool box/storage bin
- 2 in (2.5 cm) ball hitch
- 2-5/16 in (5.9 cm) ball hitch
- Full-size spare tire

CABINET

- Fire extinguisher
- Control panel light
- Interior lights

CONTROL SYSTEM

- 3-position phase switch with auxiliary V-flex switch
- PMG/DVR
- Paralleling
- Battery disconnect switch
- Cam locks
- 10 A battery charger



RATING DEFINITIONS

Standby: Applies to varying emergency load for the duration of a utility power outage.

Prime: Applies to supplying power to a varying load in lieu of utility for an unlimited amount of running time.

*Consult factory for availability

MDG100DF4CAN6 | 4.5 L | 100 kVA

MOBILE DIESEL GENERATOR SET

EPA Emissions Certification: Final Tier 4



APPLICATION AND ENGINEERING DATA

ENGINE SPECIFICATIONS

General

Make (Model)	John Deere (4045HFG04A)
EPA Emissions Compliance	Final Tier 4
After-Treatment System	DOC and SCR
Cylinders: Configuration-Qty	Inline-6
Displacement: in ³ (L)	275 (4.5)
Bore: in (mm)	4.2 (106)
Stroke: in (mm)	5.0 (127)
Compression Ratio	17:1
Intake Air Method	Turbo/air-to-air, after-cooled

Engine Governing

Governor	Electronic
Frequency Regulation (Steady State)	2%

Lubrication System

Oil Pump Type	Gear
Oil Filter Type	Spin-on cartridge
Crankcase Capacity: qt (L)	15.9 (15)

Cooling System

Cooling System Type	Radiator and CAC
Water Pump Type	Belt driven
Fan Type	Pusher
Fan Speed: rpm	1,800
Fan Diameter: in (mm)	23.2 (590)
Cooling System Capacity: qt (L)	22.0 (20.8)

Fuel System

Fuel Type	Ultra low sulfur diesel
Fuel Specifications	EN 590/ASTM D975
Fuel Filtering: μ	Primary: 10 Final: 2
Fuel Injection Pump: Make (Model)	Denso HP3
Fuel Pump Type	Engine driven – belt
Injection Type	Electronic
Engine Type	Direct Injection
Fuel Supply Line Diameter: in (mm)	.313 (8.0)
Fuel Return Line Diameter: in (mm)	.313 (8.0)

Engine Electrical System

System Voltage: VDC	12
Battery Charger Alternator	STD
Battery: CCA	750
Battery: V (Qty)	12 (1)
Ground Polarity	Negative (-)

ALTERNATOR SPECIFICATIONS

Make (Model)	Marathon Electric (362PSL36115)
Poles: Qty	4
Field Type	Rotating
Insulation Class—Rotor	H
Insulation Class—Stator	H
Total Harmonic Distortion (THD)	<3.5%
Telephone Interference Factor (TIF)	<50
Standard Excitation	Brushless

Bearings	Single bearing
Coupling	Direct, flex disc
Prototype Short Circuit Test	Yes
Voltage Regulator Type	Analog
Number of Sensed Phases	1
Regulation Accuracy (Steady State)	\pm 1%

MDG100DF4CAN6 | 4.5 L | 100 kVA

MOBILE DIESEL GENERATOR SET

EPA Emissions Certification: Final Tier 4



MOBILE

OPERATING DATA

POWER RATINGS

	Standby: KW/kVA (A)	Prime: KW/kVA (A)
1-phase, 120/240 VAC @ 1.0 pf	55/55 (229)	51/51 (212)
3-phase, 120/208 VAC @ 0.8 pf	85/106.25 (295)	80/100 (278)
3-phase, 277/480 VAC @ 0.8 pf	85/106.25 (128)	80/100 (120)
3-phase, 346/600 VAC @ 0.8 pf	85/106.25 (102)	80/100 (96)

STARTING CAPABILITIES (SKVA)

sKVA vs. Voltage Dip

208 VAC		
150	vs.	28.60%

FUEL AND DEF CONSUMPTION RATES

Load	Fuel: gal/hr (L/hr)		DEF: gal/hr (L/hr)	
	@ Standby	@ Prime	@ Standby	@ Prime
25%	2.0 (7.57)	1.90 (6.37)	TBD	TBD
50%	3.46 (13.10)	3.17 (12.02)	TBD	TBD
75%	4.95 (18.75)	4.51 (17.07)	TBD	TBD
100%	6.64 (25.12)	6.01 (22.72)	TBD	0.26 (1.15)

Deration – Operational characteristics consider maximum ambient conditions. Derate factors may apply under atypical site conditions.

Please consult a Generac Mobile Authorized Service Dealer for additional details. All performance ratings in accordance with ISO3046, BS5514, ISO8528, ISO8665, ISO3046, SAE J1228, SAE J1995, and DIN6271 standards.


MDG100DF4CAN6 | 4.5 L | 100 kVA

MOBILE DIESEL GENERATOR SET

EPA Emissions Certification: Final Tier 4



DIMENSIONS AND WEIGHTS*

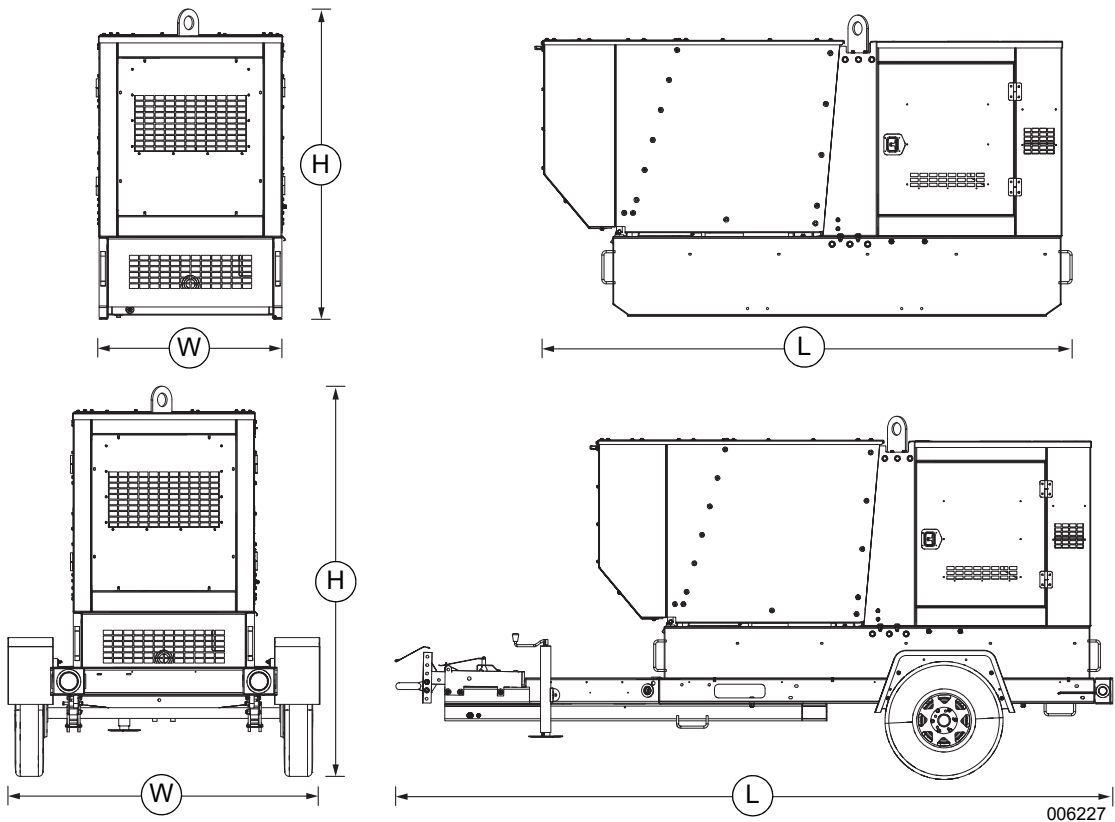

	Run Time: hr	Usable Fuel Capacity: gal (L)	Dimensions – L×W×H: in (m)	Weight: lb (kg)
Skid	24	146 (552)	119×40×62 (3.02×1.02×1.57)	Dry: 3,980 (1,805)
				Operating: 4,940 (2,240)
Trailer	24	146 (552)	170×69×80 (4.31×1.75×2.03)	Dry: 4,680 (2,122)
				Operating: 5,640 (2,555)

* All measurements are approximate and for estimation purposes only.

YOUR FACTORY RECOGNIZED GENERAC MOBILE DEALER

Specification characteristics may change without notice. Dimensions and weights are for preliminary purposes only. Please consult a Generac Mobile Authorized Service Dealer for detailed installation drawings.